



is a new generation vibratory roller with the high comfort for an operator, up-to-date design with the "1 x 1 m" visibility and with an extremely low gravity centre. VV 1500 D is designed for medium and large scale compaction of rockfill, loose, semi-cohesive materials and stabilization. The machine is based on an articulated frame with a hydrostatic drive system of a smooth vibratory drum and two rubber tyred wheels. VV 1500 PD is designed for medium and large scale compaction of semi-cohesive and cohesive materials. The machine is based on an articulated frame with a hydrostatic drive system of a padded vibratory drum and two rubber-tyred wheels. Direct drive of the rear wheels through the hydromotors with gearboxes enables a very low built in mounting of the driving power unit, by keeping the minimal length of the machine. It offers to the user the advantage of an excellent view from the operator's place and excellent machine stability and manoeuvrability in comparison with the other machines, which are equipped with the rigid driving axles. The vibration source is a double staged undirected vibration exciter, placed in the centre of the drum. The machine is equipped with a hydrostatic drive of all machine functions, Cummins engine, hydraulic Sauer-Danfoss. It fulfils the requirements of pollutants emission directives 97/68/ECE Stage 2 and EPA/CARB Tier 2. The machine meets the CE marking conditions. **Blade version available.**

STANDARD

VV 1500 D / VV 1500 PD

- ☒ Cabin ventilated and heated
- ☒ Two mode vibrator
- ☒ Articulated frame
- ☒ Interwheel differential lock
- ☒ Working halogen headlights
- ☒ Hand-pump hood and cabin tilting
- ☒ Painting STA: yellow, grey

VV 1500 D

- ☒ Tyres 23,1-26 tread UK 5 (10 PR)

VV 1500 PD

- ☒ Tyres 23,1-26 tread R1 (TD-01) (10 PR)

OPTIONS

VV 1500 D / VV 1500 PD

- ☐ Operator platform without cabin with rails
- ☐ Lockable vandal guard
- ☐ Engine CUMMINS 6BT5.9-C148 (110kW) - Stage 1/Tier 1
- ☐ Dozing blade
- ☐ Diff lock interaxle ASC
- ☐ Electrohydraulic cabin and hood tilting
- ☐ Engine air pre-cleaner for extra hard conditions
- ☐ ROPS protection (obligatory for CE)
- ☐ Cabin FOPS protection
- ☐ FOPS sun roof (mounted to ROPS)
- ☐ ROPS canvas canopy (mounted to ROPS)
- ☐ Air conditioning
- ☐ Compaction indicator
- ☐ Compaction indicator printer
- ☐ Fan safety screen
- ☐ Alternator safety screen
- ☐ Turn indicators
- ☐ Beacon
- ☐ Back up alarm
- ☐ Engine speed indicator
- ☐ Tyres ballast liquid filling to 0 centigrades
- ☐ Tyres ballast liquid filling to -25 centigrades
- ☐ Special painting

VV 1500 D

- ☐ Segment kit 150 pads
- ☐ Tyres 23,1-26 tread R1 (TD-01) (10 PR) instead of standard ones

VV 1500 PD

- ☐ Tyres 23,1-26 tread UK 5 (10 PR) instead of standard ones



MAXIMAL COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS (m)

	Rockfill	Sand/Gravel	Mixed soils	Silt	Clay	Stabilization
VV 1500 D	1,20 m	0,80 m	0,70 m	0,50 m	0,30 m	-
VV 1500 PD	-	-	0,70 m	0,50 m	0,35 m	-

VV 1500 D VV 1500 PD



size (mm)	A	D	D1	G	G1	H	H1	L	T	W	W1	W2
VV 1500 D	2820	1500		420	430	3030	2375	5686	40	2200	2500	142
VV 1500 PD	2820	1440	1640	420	430	3030	2375	5686	28	2200	2500	142

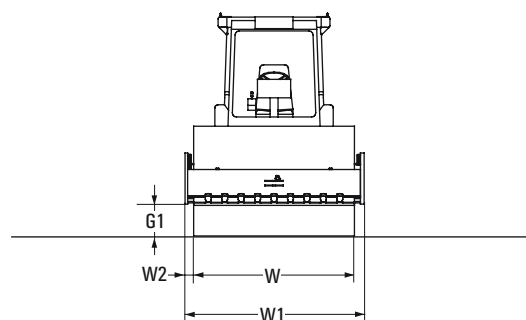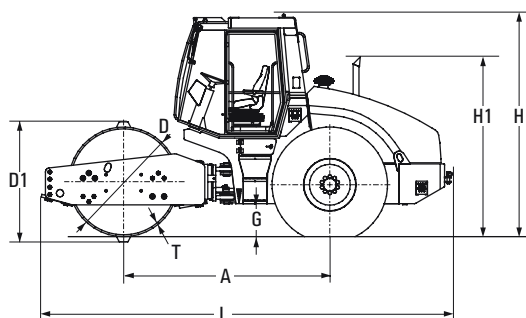

CAPACITY

	VV 1500 D	VV 1500 PD
Operating weight (CECE)	14380 kg	14070 kg

WEIGHTS

Ballast	1200 kg	1200 kg
Operating weight maximum	15750 kg	15660 kg
Drum load (CECE)	10200 kg	10110 kg
Axle load (CECE)	4180 kg	4180 kg
Static linear load	46,4 kg/cm	

DRUM

No. of pad feet		140
Height of pad		100 mm
Contact area of one pad foot		120 cm ²

STEERING

Steering angle (+ -)	36 deg	36 deg
Oscillation angle (+ -)	10 deg	10 deg
Turning radius inner (edge)	3050 mm	3050 mm
Turning radius outer (contour)	5395 mm	5395 mm
Transversal stability - straight	37 deg	37 deg

RIDING CHARACTERISTIC

No. of travel speeds	4	4
Maximal speed	10 km/h	10,1 km/h
Gradeability without vibration	45%	45%
Gradeability with vibration	45%	45%

BRAKES

Operation	Hydrostatic	Hydrostatic
Parking	Multi disc	Multi disc
Emergency	Multi disc	Multi disc

VIBRATION

Amplitudes	2 / 1 mm	2 / 1 mm
Frequencies	29 / 35 Hz	29 / 35 Hz
Centrifugal forces	325 / 237 kN	325 / 237 kN

TANKS

Fuel	410 lt	410 lt
------	--------	--------

ELEKTROINSTALLATION

Voltage	24 V	24 V
Capacity of batteries	2x100 Ah	2x100 Ah

ENGINE

Make	Cummins	Cummins
Type	QSB5.9-30-T-C115	QSB5.9-30-T-C115
Rated power	116 kW	116 kW
Standard	ISO 3046/1 (DIN 6271)	ISO 3046/1 (DIN 6271)

Technical modifications and data reserved. Machines may be shown with options.



STAVOSTROJ, a.s.

Náchodská 145, 549 01 Nové Město nad Metují, Czech Republic

phone: +420 491 476 111

fax: +420 491 470 215, 491 470 405

e-mail: stavo@sta.cz, stasales@sta.cz, www.sta.cz

CERTIFICATED:
ISO 9001